PHILIPS

Philips 5000 series 27E1N5300AE/00 Monitor PC 68,6 cm (27") 1920 x 1080 Pixel Full HD LCD Nero

Marchio : Philips

Famiglia del prodotto: 5000 series

Codice prodotto: 27E1N5300AE/00

Nome del prodotto : 27E1N5300AE/00

Monitor 27E1N5300AE Monitor USB-C

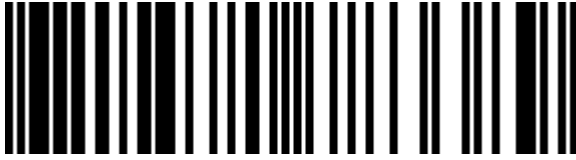Philips 5000 series 27E1N5300AE/00 Monitor PC 68,6 cm (27") 1920 x 1080 Pixel Full HD LCD Nero:

Questo monitor multifunzione USB-C Philips offre una configurazione senza ingombro. Tramite un solo cavo potrai visualizzare video fluidi ad alta risoluzione, trasferire dati e caricare il computer portatile. Un vero hub per i professionisti spesso in movimento.
Philips 5000 series 27E1N5300AE/00. Dimensioni diagonale schermo: 68,6 cm (27"), Risoluzione del display: 1920 x 1080 Pixel, Tipologia HD: Full HD, Tecnologia display: LCD, Superficie display: Opaco, Tempo di risposta: 4 ms, Rapporto d'aspetto nativo: 16:9, Angolo di visualizzazione (orizzontale): 178°, Angolo di visualizzazione (verticale): 178°. Altoparlanti incorporati. Hub USB integrato, Versione dell'hub USB: 3.2 Gen 1 (3.1 Gen 1). Montaggio standard VESA, Regolazione altezza. Colore del prodotto: Nero

Display

Display diagonal *	68.6 cm (27")
Display resolution *	1920 x 1080 pixels
HD type *	Full HD
Native aspect ratio *	16:9
Display technology *	LCD
Panel type *	IPS
Backlight type	W-LED
Touchscreen *	✗
Display brightness (typical)	300 cd/m²
Response time *	4 ms
Display surface	Matt
Anti-glare screen	✔
Screen shape *	Flat
Aspect ratio	16:9
Contrast ratio (typical) *	1000:1
Dynamic contrast ratio marketing name	Mega Infinity DCR
Maximum refresh rate *	75 Hz
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours *	16.7 million colours
Response time (fast)	1 ms
Pixel pitch	0.3114 x 0.3114 mm
Pixel density	81.59 ppi
Horizontal scan range	30 - 85 kHz
Vertical scan range	48 - 75 Hz
Viewable size, horizontal	59.8 cm
Viewable size, vertical	33.6 cm
Display diagonal (metric)	68.6 cm
DDC/CI	✔
Haze rate	25%

Ergonomics

Height adjustment	13 cm
Pivot	✔
Pivot angle	-90 - 90°
Tilt angle range	-5 - 20°
On Screen Display (OSD)	✔
On Screen Display (OSD) languages	Simplified Chinese, Traditional Chinese, Czech, German, Dutch, English, Spanish, Finnish, French, Greek, Hungarian, Italian, Japanese, Korean, Polish, Portuguese, Russian, Swedish, Turkish, Ukrainian
Number of OSD languages	21
Plug and Play	✔
LED indicators	Operation, Stand-by

Power

Energy efficiency class (SDR) *	E
Energy efficiency class (HDR) *	Not available
Energy consumption (SDR) per 1000 hours *	26 kWh
Power consumption (typical) *	25.1 W
Power consumption (standby) *	0.5 W
Power consumption (off)	0.3 W
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz
Power supply type	Internal
Energy efficiency scale	A to G
European Product Registry for Energy Labelling (EPREL) code	1073219

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-20 - 60 °C
Operating relative humidity (H-H)	20 - 80%

Display

Surface hardness	3H
Colour gamut standard	sRGB
sRGB coverage (typical)	122.8%
NTSC coverage (typical)	106.2%
Display sRGB	✔

Performance

NVIDIA G-SYNC *	✘
AMD FreeSync *	✔
AMD FreeSync type	FreeSync
Fast charging	✔
Fast charging technology	Power Delivery
Component video sync	Separate sync
Flicker-free technology	✔
Low Blue Light technology	✔

Multimedia

Number of speakers	2
RMS rated power	6 W
Built-in speaker(s) *	✔
Built-in camera *	✘

Design

Market positioning *	Home
Product colour *	Black

Ports & interfaces

Built-in USB hub *	✔
USB hub version	3.2 Gen 1 (3.1 Gen 1)
USB upstream port type	USB Type-C
Number of upstream ports	1
Number of USB Type-C upstream ports quantity	1
USB Type-A downstream ports quantity	4
USB Type-C DisplayPort Alternate Mode	✔
USB Power Delivery (USB PD)	✔
USB Power Delivery up to	65 W
HDMI *	✔
HDMI ports quantity	1
HDMI version	1.4
DisplayPorts quantity	1
DisplayPort version	1.2
Audio output	✔

Ergonomics

VESA mounting *	✔
Panel mounting interface	100 x 100 mm
Cable lock slot *	✔
Cable lock slot type	Kensington
Height adjustment *	✔

Operational conditions

Operating altitude	0 - 3658 m
Non-operating altitude	3658 - 12192 m

Weight & dimensions

Width (with stand)	612 mm
Depth (with stand)	212 mm
Height (with stand)	510 mm
Weight (with stand)	6.06 kg
Width (without stand)	612 mm
Depth (without stand)	52 mm
Height (without stand)	365 mm
Weight (without stand)	4.2 kg

Packaging data

Package width	780 mm
Package depth	186 mm
Package height	525 mm
Package weight	10.1 kg

Packaging content

Stand included	✔
Cables included	HDMI, USB Type-C to USB Type-C, AC
Manual	✔

Sustainability

Sustainability compliance	✔
Doesn't contain	Mercury

Other features

Compatible operating systems	Mac OS X Windows 10 / 8.1 / 8 / 7
USB Power Delivery revision	3.0
Exterior finish type	Textured
Recyclable packaging material	100%
Heavy metals free	Hg (mercury)
EasyRead mode	✔
LowBlue mode	✔
Weight	4.2 kg
Width	612 mm
Depth	52 mm
Compliance certificates	RoHS
Picture enhancement	SmartImage game
Regulatory Approvals	CB; CE Mark; CU-EAC; EAEU RoHS; FCC Class B; ICES-003; TUV/ISO9241-307; TUV-BAUART
Energy efficiency class (old)	F
Height	365 mm
Mean time between failures (MTBF)	50000 h
Certification	CB, CE Mark, CU-EAC, EAEU RoHS, FCC Class B, ICES-003, TUV/ISO9241-307, TUV-BAUART

Logistics data

Harmonized System (HS) code	85285210

8712581783389