



Lenovo ThinkSystem SR250 V3 server Rack (1U) Intel Xeon E E-2434 3,4 GHz 16 GB DDR5-SDRAM 800 W




Marchio : Lenovo **Famiglia del prodotto:** ThinkSystem **Codice prodotto:** 7DCLA00LEA

Nome del prodotto : SR250 V3

Lenovo ThinkSystem SR250 V3. Famiglia processore: Intel Xeon E, Frequenza del processore: 3,4 GHz, Modello del processore: E-2434. RAM installata: 16 GB, Tipo di RAM: DDR5-SDRAM, Struttura memoria: 1 x 16 GB. Collegamento ethernet LAN, Tecnologia di cablaggio: 10/100/1000Base-T(X). Alimentazione: 800 W, Supporto Redundant power supply (RPS). Tipo di case: Rack (1U)

Processor		Ports & interfaces	
Processor manufacturer *	Intel	USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	3
Processor family *	Intel Xeon E	VGA (D-Sub) ports quantity	1
Processor model *	E-2434	Serial ports quantity	1
Processor frequency *	3.4 GHz	Design	
Processor boost frequency	5 GHz	Chassis type *	Rack (1U)
Performance cores	4	Product colour	Black, Silver
Processor cores	4	Performance	
Processor cache	12 MB	Remote administration	XClarity Administrator
Motherboard chipset	Intel C266	Trusted Platform Module (TPM)	✓
Number of processors installed	1	Trusted Platform Module (TPM) version	2.0
Memory		Software	
Internal memory *	16 GB	Compatible operating systems *	Microsoft Windows Server Red Hat Enterprise Linux SUSE Linux Enterprise Server VMware ESXi
Internal memory type *	DDR5-SDRAM		
Memory slots	4x DIMM		
ECC	✓		
Memory clock speed	4800 MHz	Power	
Memory layout (slots x size)	1 x 16 GB	Redundant power supply (RPS) support *	✓
Maximum internal memory *	128 GB	Power supply *	800 W
Storage		Power supply input voltage	100 - 240 V
RAID support *	✓	Power supply input frequency	50/60 Hz
RAID levels	0, 1, 5, 10	Operational conditions	
Internal drive bays	8	Storage temperature (T-T)	-40 - 60 °C
Supported storage drive interfaces	SAS, Serial ATA	Storage relative humidity (H-H)	8 - 90%
Graphics		Operating altitude	0 - 3050 m
On-board graphics card	✓	Certificates	
Maximum graphics card memory	16 MB	80 PLUS certification	80 PLUS Platinum
Network		Weight & dimensions	
LAN controller	Broadcom BCM5720	Width	434.4 mm
Ethernet LAN	✓	Depth	561 mm
Cabling technology	10/100/1000Base-T(X)	Height	43 mm
Ethernet interface type	Gigabit Ethernet	Technical details	
Ports & interfaces		Supported storage drives form factor (rear)	2.5"
Ethernet LAN (RJ-45) ports *	2		
USB 2.0 ports quantity	2		

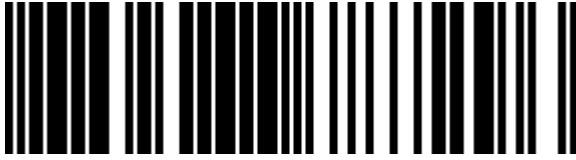

0889488787296



889488787296

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 23-FEB-2025. Prints or copies of Information are only valid on the printed Publication date