Lenovo

Lenovo ThinkSystem ST50 V3 server 1,92 TB Tower Intel Xeon E E-2414 2,6 GHz 16 GB DDR5-SDRAM 500 W

Lenovo.

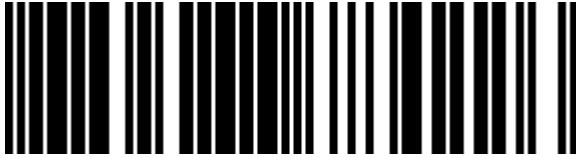**Marchio :** Lenovo

Famiglia del prodotto: ThinkSystem

Codice prodotto: 7DF3A010EA

Nome del prodotto : ST50 V3

Lenovo ThinkSystem ST50 V3. Famiglia processore: Intel Xeon E, Frequenza del processore: 2,6 GHz, Modello del processore: E-2414. RAM installata: 16 GB, Tipo di RAM: DDR5-SDRAM, Struttura memoria: 1 x 16 GB. Capacità totale di archiviazione: 1,92 TB, Interfaccia hard disk: SATA. Collegamento ethernet LAN, Tecnologia di cablaggio: 10/100/1000Base-T(X). Alimentazione: 500 W. Tipo di case: Tower

Processor

Processor manufacturer *	Intel
Processor family *	Intel Xeon E
Processor model *	E-2414
Processor frequency *	2.6 GHz
Processor boost frequency	4.5 GHz
Performance cores	4
Processor cores	4
Processor cache	12 MB
Motherboard chipset	Intel C266
Number of processors installed	1

Memory

Internal memory *	16 GB
Internal memory type *	DDR5-SDRAM
Memory slots	4x DIMM
ECC	✔
Memory clock speed	4400 MHz
Memory layout (slots x size)	1 x 16 GB
Maximum internal memory *	128 GB

Storage

Total storage capacity *	1.92 TB
Number of HDDs installed	2
HDD capacity	960 GB
HDD interface	SATA
Optical drive type *	✘
Internal drive bays	3
Supported storage drive interfaces	Serial ATA

Graphics

On-board graphics card	✔
Maximum graphics card memory	16 MB

Network

LAN controller	Broadcom BCM5720
Ethernet LAN	✔
Cabling technology	10/100/1000Base-T(X)
Ethernet interface type	Gigabit Ethernet

Ports & interfaces

Ethernet LAN (RJ-45) ports *	2
USB 2.0 ports quantity	2
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	5
VGA (D-Sub) ports quantity	1
Serial ports quantity	1

Design

Chassis type *	Tower
Product colour	Black

Performance

Trusted Platform Module (TPM)	✔
Trusted Platform Module (TPM) version	2.0

Software

Compatible operating systems *	Microsoft Windows Server Red Hat Enterprise Linux SUSE Linux Enterprise Server VMware ESXi

Power

Power supply *	500 W
Power supply input voltage	100 - 240 V
Power supply input frequency	50/60 Hz

Operational conditions

Storage temperature (T-T)	-20 - 60 °C
Storage relative humidity (H-H)	8 - 90%
Operating altitude	0 - 3050 m

Certificates

80 PLUS certification	80 PLUS Platinum

Weight & dimensions

Width	170 mm
Depth	370 mm
Height	376 mm
Weight	12 kg

Technical details

Supported storage drives form factor (internal)	3.5"

0889488784226

889488784226