



DELL P7524QT 189,3 cm (74.5") LCD 3840 x 2160 Pixel 4K Ultra HD

Marchio : DELL

Codice prodotto: DELL-P7524QT

Nome del prodotto : P7524QT

- 75" 4K UHD 3840 x 2160, IPS
 - 8ms, 16:9, 350cd/m², 1200:1
 - USB, HDMI, VGA, DisplayPort
- 75" 4K UHD 3840 x 2160, IPS, 16:9, 350 cd/m² 1.07 Billion, 8 ms, 178°/178°, 1200:1

DELL P7524QT 189,3 cm (74.5") LCD 3840 x 2160 Pixel 4K Ultra HD:

Riunisci il team, sia in sala che in remoto, con questo brillante monitor UHD 4K da 75" con touch-screen a 20 punti, riconoscimento del palmo e due altoparlanti da 20 W integrati.

DELL P7524QT. Dimensioni diagonale schermo: 189,3 cm (74.5"), Tecnologia display: LCD, Risoluzione del display: 3840 x 2160 Pixel. Potenza in uscita (RMS): 40 W. Colore del prodotto: Nero, Forma dello schermo: Piatto, Panel mounting interface 24/5000 Interfaccia per montaggio a pannello: 400 x 400 mm. Versione USB: 2.0/3.2 Gen 1 (3.1 Gen 1), Connettore USB: Mini-USB A, Corrente di carica USB: 2 A. Sistema operativo Windows supportato: Windows 7 Professional, Windows 7 Ultimate, Windows 8, Windows 8.1, Compatibilità sistema operativo Mac: Mac OS X 10.10 Yosemite, Mac OS X 10.11 El Capitan




Display		Computer system	
Display diagonal *	189.3 cm (74.5")	Linux operating systems supported ✓	
Display technology *	LCD	Performance	
Panel type	IPS	On Screen Display (OSD) ✓	
LED backlight	✓	Power	
Display resolution *	3840 x 2160 pixels	Power consumption (typical)	140 W
Display brightness	350 cd/m ²	Power consumption (max)	290 W
HD type *	4K Ultra HD	Power consumption (standby)	0.5 W
Touchscreen *	✓	AC input voltage	100 - 240 V
Number of simultaneous touchpoints	20	AC input frequency	50/60 Hz
Multi-touch	✓	Energy efficiency scale	A to G
Native aspect ratio *	16:9	Energy efficiency class (SDR) *	G
Native refresh rate	60 Hz	Energy consumption (SDR) per 1000 hours *	140 kWh
Response time	8 ms	Power supply type	Internal
Contrast ratio (typical)	1200:1	Operational conditions	
Viewing angle, horizontal	178°	Operating temperature (T-T)	0 - 40 °C
Viewing angle, vertical	178°	Storage temperature (T-T)	-20 - 60 °C
Display number of colours	1.07 billion colours	Operating relative humidity (H-H)	10 - 80%
sRGB coverage (typical)	72%	Storage relative humidity (H-H)	5 - 90%
Pixel pitch	0.429 x 0.429 mm	Weight & dimensions	
Display diagonal (metric)	189.273 cm	Display width	1735 mm
Anti-glare screen	✓	Display depth	79.1 mm
Audio		Display height	1017.4 mm
Built-in speaker(s)	✓	Display weight	64 kg
Number of built-in speakers	2	Packaging data	
RMS rated power	40 W	Package weight	102 kg
Design			
Product colour *	Black		

Design		Packaging content	
Screen shape	Flat	Remote control included	✓
VESA mounting *	✓	Stylus pen	✓
Panel mounting interface	400 x 400 mm	Number of stylus pens	2
Bezel width (bottom)	4.67 cm	Cables included	AC, DisplayPort, HDMI, USB, VGA
Bezel width (side)	4.27 cm	Sustainability	
Bezel width (top)	4.28 cm	Sustainability compliance	✓
Ports & interfaces		Sustainability certificates	ENERGY STAR
HDMI ports quantity *	3	Network	
HDMI version	2.0	Ethernet LAN *	✓
DVI port *	✗	Ethernet LAN (RJ-45) ports	1
VGA (D-Sub) input ports	1	Wi-Fi *	✗
DisplayPorts quantity	1	Technical details	
USB ports quantity	7	Compliance certificates	RoHS
USB version	2.0/3.2 Gen 1 (3.1 Gen 1)	Carbon footprint	
USB connector type	Mini-USB A	Total carbon footprint (kg of CO2e)	2325
Number of USB Type-B upstream ports quantity	3	Total carbon emissions, standard deviation (kg of CO2e)	671
USB Type-A downstream ports quantity	4	Carbon emissions, manufacturing (kg of CO2e)	881.84
Audio (L/R) in	1	Carbon emissions, logistics (kg of CO2e)	369.33
Audio (L/R) out	1	Carbon emissions, energy usage (kg of CO2e)	1029.89
RS-232 interface	✓	Carbon emissions, end-of-life (kg of CO2e)	44.22
USB port *	✓	Total carbon emissions, w/o use phase (kg of CO2e)	1295.11
USB Type-C DisplayPort Alternate Mode	✓	PAIA version	1.3.2, 2022
USB charging port	✓		
USB charging current	2 A		
Computer system			
Windows operating systems supported	Windows 7 Professional, Windows 7 Ultimate, Windows 8, Windows 8.1		
Mac operating systems supported	Mac OS X 10.10 Yosemite, Mac OS X 10.11 El Capitan		



5397184821558

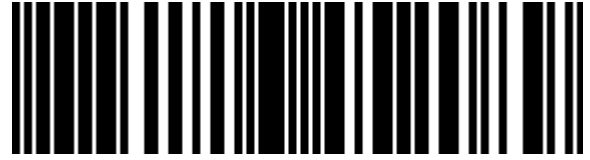

0884116452089



884116452089

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.