


## StarTech.com Adattatore scheda di rete PCIe Ethernet Gigabit PCI Express a due porte - PoE/PSE

**Marchio :** StarTech.com

**Codice prodotto:** ST2000PEXPSE

**Nome del prodotto :** Adattatore scheda di rete PCIe Ethernet Gigabit PCI Express a due porte - PoE/PSE



StarTech.com Adattatore scheda di rete PCIe Ethernet Gigabit PCI Express a due porte - PoE/PSE  
 StarTech.com Adattatore scheda di rete PCIe Ethernet Gigabit PCI Express a due porte - PoE/PSE.  
 Interno. Tecnologia di connessione: Cablato, Interfaccia host: PCI Express, Interfaccia: Ethernet. Velocità massima di trasferimento dati: 2000 Mbit/s



Connettività		Requisiti di sistema	
Tecnologia di connessione *	Cablato	Compatibilità sistema operativo Mac	Mac OS X 10.6 Snow Leopard, Mac OS X 10.7 Lion, Mac OS X 10.8 Mountain Lion, Mac OS X 10.9 Mavericks
Interfaccia host *	PCI Express	Sistema operativo Linux supportato	✓
Interfaccia *	Ethernet	Sistemi operativi server supportati	Windows Server 2003, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, Windows Server 2016, Windows Server 2019
Quantità porte Ethernet LAN (RJ-45)	2		
Quantità porte Power over Ethernet (PoE)	2		
Collegamento in rete		Condizioni ambientali	
Velocità massima di trasferimento dati *	2000 Mbit/s	Intervallo temperatura di funzionamento	0 - 55 °C
Standard di rete *	IEEE 802.1Q, IEEE 802.1p, IEEE 802.3, IEEE 802.3ab, IEEE 802.3at, IEEE 802.3u, IEEE 802.3x	Intervallo di temperatura	-20 - 85 °C
Collegamento ethernet LAN	✓	Range di umidità di funzionamento	5 - 95%
Velocità trasferimento Ethernet LAN	10,100,1000 Mbit/s	Sostenibilità	
Tecnologia di cablaggio	10/100/1000BaseT(X)	Certificati di sostenibilità	RoHS
Auto MDIX IEEE	✓	Dimensioni e peso	
Full duplex	✓	Larghezza	19 mm
Supporto Jumbo Frames	✓	Profondità	195 mm
VLAN tagging	✓	Altezza	68 mm
Controller LAN	Realtek RTL8111E	Peso	104 g
Design		Dati su imballaggio	
Componente per *	PC	Drivers inclusi	✓
Interno *	✓	Staffa a basso profilo	✓
Chipset	Realtek - RTL8111E	Larghezza imballo	231 mm
Indicatori LED	Attività, Collegamento, PoE	Profondità imballo	165 mm
Tempo medio tra guasti (MTBF)	140981 h	Altezza imballo	45 mm
Certificazione	CE, FCC, REACH	Peso dell'imballo	246 g
Gestione energetica			
Voltaggio di uscita	48 V		


Requisiti di sistema	Contenuto dell'imballo
Sistema operativo Windows supportato	Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10 Enterprise x64, Windows 10 Home, Windows 10 Home x64, Windows 10 IOT Core, Windows 10 Pro, Windows 10 Pro x64, Windows 10 x64, Windows 2000, Windows 7, Windows 7 Enterprise, Windows 7 Enterprise x64, Windows 7 Home Basic, Windows 7 Home Basic x64, Windows 7 Home Premium, Windows 7 Home Premium x64, Windows 7 Professional, Windows 7 Professional x64, Windows 7 Starter, Windows 7 Starter x64, Windows 7 Ultimate, Windows 7 Ultimate x64, Windows 7 x64, Windows 8, Windows 8 Enterprise, Windows 8 Enterprise x64, Windows 8 Pro, Windows 8 Pro x64, Windows 8 x64, Windows 8.1, Windows 8.1 Enterprise, Windows 8.1 Enterprise x64, Windows 8.1 Pro, Windows 8.1 Pro x64, Windows 8.1 x64, Windows 98SE, Windows ME, Windows Vista Business, Windows Vista Business x64, Windows Vista Enterprise, Windows Vista Enterprise x64, Windows Vista Home Basic, Windows Vista Home Basic x64, Windows Vista Home Premium, Windows Vista Home Premium x64, Windows Vista Ultimate, Windows Vista Ultimate x64, Windows Vista x64, Windows XP, Windows XP Home, Windows XP Home x64, Windows XP Professional, Windows XP Professional x64
	Manuale dell'utente <span style="float: right;">✓</span>
	Dati logistici
	Codice del Sistema Armonizzato (SA) <span style="float: right;">85176990</span>
	Altre caratteristiche
	Dimensioni buffer <span style="float: right;">48 KB</span>
	Supporto controllo flusso <span style="float: right;">✓</span>



0065030849128



065030849128

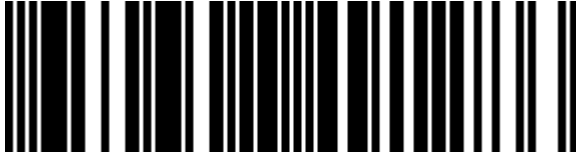

0650308491286



650308491286

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.