



TP-Link TL-SL1218P switch di rete Non gestito Gigabit Ethernet (10/100/1000) Supporto Power over Ethernet (PoE) 1U Nero

Marchio : TP-Link

Codice prodotto: TL-SL1218P

Nome del prodotto : TL-SL1218P



TP-Link TL-SL1218P. Tipo interruttore: Non gestito. Tipo di porte RJ-45: Gigabit Ethernet (10/100/1000), Quantità di porte RJ-45: 18. Dimensioni tavola MAC: 8000 voci, Capacità di commutazione: 7,2 Gbit/s. Standard di rete: IEEE 802.3af, IEEE 802.3at, IEEE 802.3x. Supporto Power over Ethernet (PoE). Montaggio rack, Fattore di forma: 1U



Management features		Power	
Switch type *	Unmanaged	AC input voltage	100 - 240 V
Traffic classification	✓	AC input frequency	50 - 60 Hz
Ports & interfaces		Power consumption (max)	172.8 W
Basic switching RJ-45 Ethernet ports quantity *	18	Power over Ethernet (PoE)	
Basic switching RJ-45 Ethernet ports type *	Gigabit Ethernet (10/100/1000)	Power over Ethernet (PoE) *	✓
Fast Ethernet (copper) ports quantity	16	Power over Ethernet plus (PoE+) ports quantity	16
Gigabit Ethernet (copper) ports quantity	2	Power over Ethernet (PoE) power per port	30 W
Combo SFP ports quantity	1	Total Power over Ethernet (PoE) budget	150 W
Network		Operational conditions	
Networking standards *	IEEE 802.3af, IEEE 802.3at, IEEE 802.3x	Operating temperature (T-T)	0 - 50 °C
10G support *	✗	Storage temperature (T-T)	-40 - 70 °C
Cable types supported	Cat3, Cat4, Cat5, Cat5e, Cat6	Operating relative humidity (H-H)	10 - 90%
Auto MDI/MDI-X	✓	Storage relative humidity (H-H)	5 - 90%
Auto-negotiation	✓	Heat dissipation	589.25 BTU/h
Data transmission		Weight & dimensions	
Switching capacity *	7.2 Gbit/s	Width	440 mm
Forwarding rate	5.36 Mpps	Depth	180 mm
MAC address table *	8000 entries	Height	44 mm
Jumbo frames support	✓	Packaging content	
Jumbo frames	10000	Cables included	AC
Packet buffer memory	4.1 MB	Quick start guide	✓
Design		Packaging data	
		Package width	250 mm
		Package depth	528 mm

Design		Packaging data	
Rack mounting *	✓	Package height	80 mm
Form factor	1U	Package weight	2.8 kg
Product colour	Black	Certificates	
Housing material	Metal	Certification	CE, FCC, RoHS
LED indicators	✓	Logistics data	
Number of fans	2 fan(s)	Harmonized System (HS) code	85176990
Power			
Power source *	AC		
Power supply included *	✓		



6935364052812




6935364052829



0845973088712



845973088712

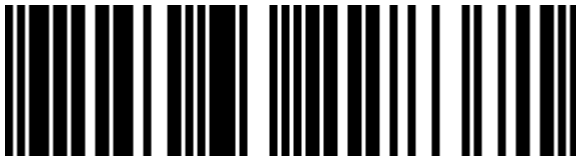

5715063228371

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.